

**Solo E.V.A. (Ethylene Vinyl Acetate) Foam Durometer 60**

**Applications:**

- Use where long wear and shock-absorption is desired

**Patient Benefits:**

- Hygenic — perspiration does not penetrate orthosis
- Easily cleaned

**Practitioner Benefits:**

- Can easily be molded into shapes and bonded to other materials

**Features:**

- Tear resistant
- Resists bottoming out (compacting)
- Absorbs shock
- Thermoformable
- Grindable
- Chemical resistant
- Bonds to other materials

**Specifications:**


- Specific gravity: 0.32 – 0.39 g/cm<sup>3</sup>
- Heating temperature: 300°F – 350°F
- Heating time: 1 – 3 minutes approx.
- Durometer Shore A: 60 ± 5
- Rebound %: 25
- Elongation %: 150

**Indications:**

- Patients requiring cushioning
- Support devices
- Foot orthotic postings
- Wedges
- Partial foot
- Insoles

**Call Points:**

- Orthotist
- Orthotic technician
- Pedorthist
- Prosthetist

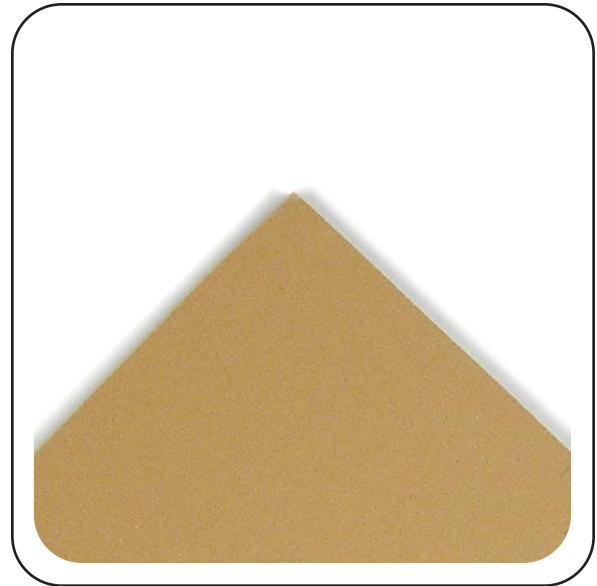

**SOLO 60 E.V.A.**

| Item No.   | Thickness | Size      | Color | Durometer* | Description    |
|------------|-----------|-----------|-------|------------|----------------|
| OP-4801-60 | 1/8"      | 35" x 39" | Brown | 65 ± 5     | SOLO 60 E.V.A. |
| OP-4802-60 | 3/16"     | 35" x 39" | Brown | 65 ± 5     | SOLO 60 E.V.A. |
| OP-4803-60 | 1/4"      | 35" x 39" | Brown | 65 ± 5     | SOLO 60 E.V.A. |
| OP-4804-60 | 3/8"      | 35" x 39" | Brown | 65 ± 5     | SOLO 60 E.V.A. |
| OP-4805    | 1/2"      | 35" x 39" | Brown | 65 ± 5     | SOLO 60 E.V.A. |

\* Shore A.