


## » SoleTech, Inc.

### Ultra-Cloud:

Ultra-Cloud is a unique soft lightweight thermo-moldable EVA that provides long lasting shock absorbing protection. It can be used against the skin as a top cover or padding.

- **Shore A Durometer:** 17–20
- **Heating Temp:** 175-250 °F – 1 to 2 minutes
- **Colors:** Black, White & Medical Blue
- **Glues:** Barge, Colle de Cologne, Helmifix
- **Grindability:** Good
- **Washable:** Yes
- **Spot Adjustable with Heat Gun:** Yes
- **Uses:** Top cover for Foot Orthotics, Prosthetics, and Padding

Item No.	Thickness	Size	Irons
OP-E8506-C	3mm (1/8")	18"x36"	6
OP-E8509-C	5mm (3/16")	18"x36"	9
OP-E8512-C	6mm (1/4")	18"x36"	12
OP-E8518-C	10mm (3/8")	18"x36"	18
OP-E8524-C	12mm (1/2")	18"x36"	24

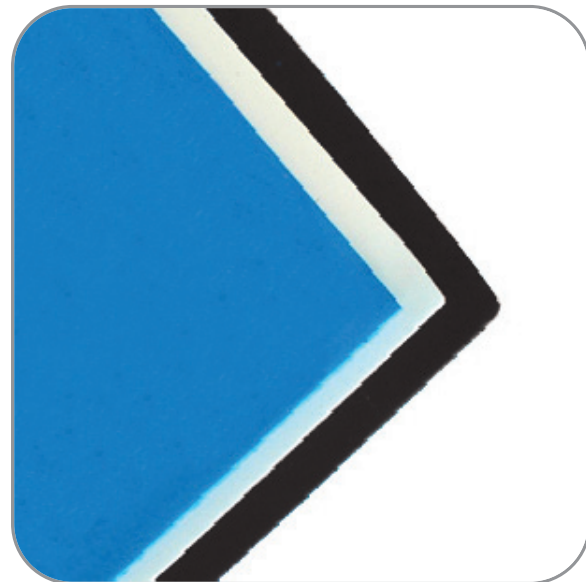


Available Colors for Ultra Cloud

### Cloud:

Cloud is a durable and thermo-moldable medium density EVA that provides excellent support and shock absorbing protection. It keeps its flexibility after molding and can be used against the skin.


- **Shore A Durometer:** 35 – 40
- **Heating Temp:** 275 °F – 1 to 2 minutes
- **Colors:** Black, White, Brown, Almond, Gray, Red & Medical Blue
- **Glues:** Barge, Colle de Cologne, Helmifix
- **Grindability:** Excellent
- **Washable:** Yes
- **Spot Adjustable with Heat Gun:** Yes
- **Uses:** Foot Orthotics, Prosthetics, and Padding

Item No.	Thickness	Size	Irons
OP-E8103-C	1.5mm (1/16")	18"x36"	3
OP-E8106-C	3mm (1/8")	18"x36"	6
OP-E8112-C	6mm (1/4")	18"x36"	12
OP-E8118-C	10mm (3/8")	18"x36"	18
OP-E8124-C	12mm (1/2")	18"x36"	24
OP-E8130-C	16mm (5/8")	18"x36"	30
OP-E8136-C	19mm (3/4")	18"x36"	36
OP-E8148-C	25mm (1")	18"x36"	48

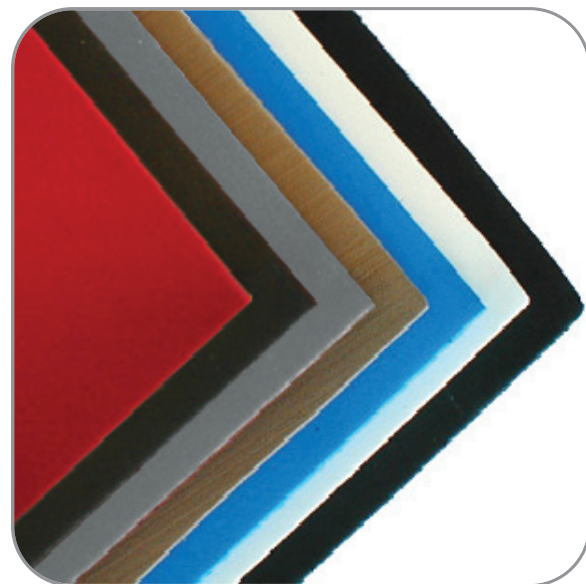

Available Colors for Cloud

C = Color. Please see page 5 for color chart.

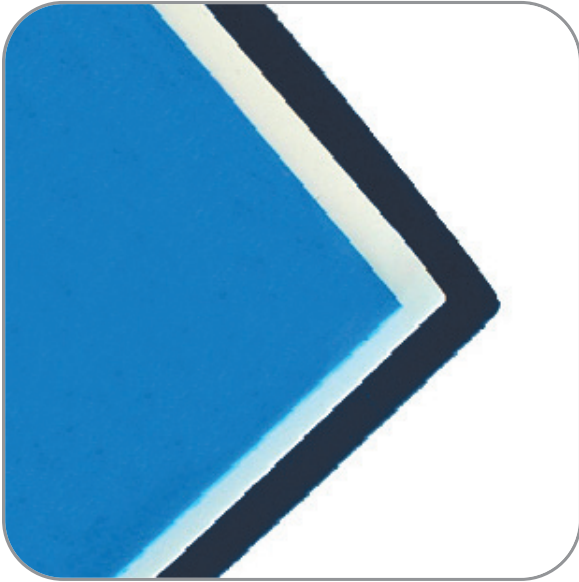» **SoleTech, Inc.***Available Colors Cloud 45***Cloud 45:**

Cloud 45 like Cloud is a durable, thermo-moldable moderate density EVA with a Shore A hardness between Cloud and SoleFlex. This Microcell EVA will supply both support and flexibility and has excellent shock absorbing protection.

- **Shore A Durometer:** 43 – 48
- **Heating Temp:** 275°F – 2 minutes
- **Colors:** White, Medical Blue & Navy
- **Glues:** Barge, Colle de Cologne, Helmifix
- **Grindability:** Excellent
- **Washable:** Yes
- **Spot Adjustable with Heat Gun:** Yes
- **Uses:** Foot Orthotics, Prosthetics, and Padding

Item No.	Thickness	Size	Irons
OP-E8606- <b>C</b>	3mm (1/8")	18"x36"	6
OP-E8612- <b>C</b>	6mm (1/4")	18"x36"	12
OP-E8618- <b>C</b>	10mm (3/8")	18"x36"	18
OP-E8624- <b>C</b>	12mm (1/2")	18"x36"	24

**C** = Color. Please see page 5 for color chart.

## » SoleTech, Inc.


### SolFlex (Crepe):

SolFlex is a moderately firm density EVA/SBR blend that is durable, resilient and thermo-moldable. It can be used against the skin. It is available with or without the Diamond sole pattern, and can be used as outsoleing. Also referred to as Crepe.

- **Shore A Durometer:** 50 – 55
- **Heating Temp:** 275 °F – 2 minutes
- **Colors:** Black, Brown, White, Almond, Red, Clay & Gray
- **Glues:** Barge, Colle de Cologne, Helmifix
- **Grindability:** Excellent
- **Washable:** Yes
- **Spot Adjustable with Heat Gun:** Yes
- **Uses:** Foot Orthotics, Posting/Wedging, Midsoling

Item No.	Thickness	Size	Irons
<b>SolFlex (Crepe)</b>			
OP-E8206-C	3mm (1/8")	18"x36"	6
OP-E8212-C	6mm (1/4")	18"x36"	12
OP-E8218-C	10mm (3/8")	18"x36"	18
OP-E8224-C	12mm (1/2")	18"x36"	24
OP-E8230-C	16mm (5/8")	18"x36"	30
OP-E8236-C	19mm (3/4")	18"x36"	36
<b>SolFlex Diamond (Crepe)</b>			
OP-E8312-C	6mm (1/4")	18"x36"	12
OP-E8315-C	8mm (5/16")	18"x36"	15
OP-E8318-C	10mm (3/8")	18"x36"	18
OP-E8321-C	8mm (7/16")	18"x36"	21
OP-E8324-C	12mm (1/2")	18"x36"	24
OP-E8330-C	16mm (5/8")	18"x36"	30
OP-E8336-C	19mm (3/4")	18"x36"	36

**C** = Color. Please see page 6 for color chart.

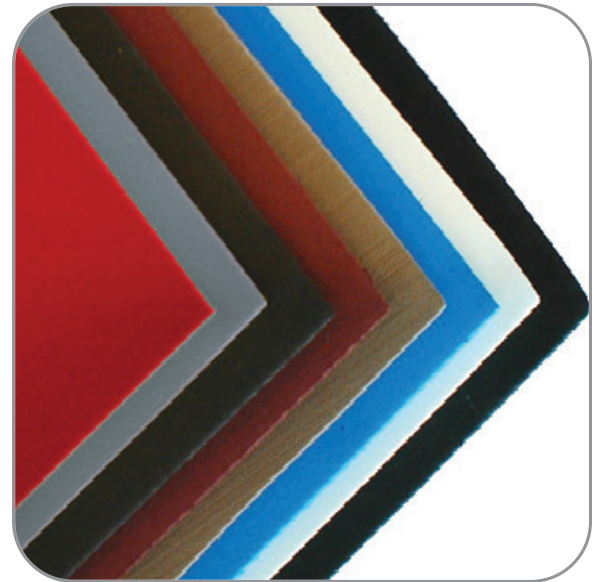

Available Colors for SolFlex (Crepe)



Available Colors for SolFlex Diamond (Crepe)

» **SoleTech, Inc.**



Available Colors for SolFlex Firm



Available Colors for SolFlex Extra Firm

**SolFlex Firm:**

SolFlex Firm is a firmer EVA/SBR blend that is very durable and abrasive resistant enough to be used for outsoleing. It is used extensively in posting/wedging & shoe buildups.

- **Shore A Durometer:** 60 – 65
- **Heating Temp:** 275 °F – 2 minutes
- **Colors:** Black, White, Medical Blue, Navy & Red
- **Glues:** Barge, Colle de Cologne, Helmifix
- **Grindability:** Good
- **Washable:** Yes
- **Spot Adjustable with Heat Gun:** No
- **Uses:** Foot Orthotics, Posting/Wedging, and Outsoleing

Item No.	Thickness	Size	Irons
OP-E8406-C	3mm (1/8")	18"x36"	6
OP-E8412-C	6mm (1/4")	18"x36"	12
OP-E8415-C	8mm (5/16")	18"x36"	15
OP-E8418-C	10mm (3/8")	18"x36"	18
OP-E8424-C	12mm (1/2")	18"x36"	24
OP-E8430-C	16mm (5/8")	18"x36"	30
OP-E8436-C	19mm (3/4")	18"x36"	36

**SolFlex Extra Firm:**

SolFlex Extra Firm is the firmest EVA/SBR blend that SoleTech offers. It is for those posting and buildup applications that require the maximum in support.

- **Shore A Durometer:** 70 – 75
- **Heating Temp:** 275 °F – 2 to 3 minutes
- **Colors:** White, Black & Brown
- **Glues:** Barge, Colle de Cologne, Helmifix
- **Grindability:** Excellent
- **Washable:** Yes
- **Spot Adjustable with Heat Gun:** No
- **Uses:** Foot Orthotics, Posting/Wedging, Midsoling

Item No.	Thickness	Size	Irons
OP-E9506-C	3mm (1/8")	18"x36"	6
OP-E9512-C	6mm (1/4")	18"x36"	12
OP-E9518-C	10mm (3/8")	18"x36"	18
OP-E9524-C	12mm (1/2")	18"x36"	24

C = Color. Please see page 6 for color chart.

**» SoleTech, Inc.**
**SoleTech, Inc. » Cloud Color Chart**

Material		Colors Available							
Item	Iron	White (WHT)	Black (BLK)	Gray (GRY)	Almond (AL)	Brown (BRN)	Red (RED)	Med. Blue (MDB)	Navy (NVY)
Ultra Cloud	6	X	X					X	
	9							X	
	12	X	X					X	
	18		X						
	24	X	X					X	
Cloud	3	X			X			X	
	6	X	X	X	X	X	X	X	
	12	X	X	X	X	X	X	X	
	18	X	X	X	X	X	X	X	
	24	X	X	X	X	X	X	X	
	30	X	X			X			
	36	X	X			X			
	48	X	X	X		X			
Cloud 45	3	X						X	
	6	X						X	X
	9	X							
	12	X						X	
	18	X						X	
	24	X						X	

» **SoleTech, Inc.**

**SoleTech, Inc. » SolFlex Color Chart**

Material		Colors Available								
Item	Iron	White (WHT)	Black (BLK)	Gray (GRY)	Almond (AL)	Brown (BRN)	Red (RED)	Clay (CLY)	Med. Blue (MDB)	Navy (NVY)
<b>SolFlex (Crepe)</b>	6	X	X		X		X			
	12	X	X	X	X	X	X	X		
	18	X	X	X	X	X	X	X		
	24	X	X	X	X	X	X	X		
	30	X	X	X	X	X				
	36	X	X	X	X	X				
<b>SolFlex Diamond</b>	12	X	X	X	X	X				
	15	X	X		X	X				
	18	X	X	X	X	X				
	21	X	X		X	X				
	24	X	X	X	X	X				
	30	X	X		X	X				
	36	X	X		X	X				
<b>SolFlex Firm</b>	6	X	X							
	12	X	X				X		X	
	15		X							
	18	X	X				X		X	X
	24	X					X		X	X
	30	X								
<b>SolFlex Extra Firm</b>	6		X							
	12		X							
	18	X				X				
	24		X							


## » SoleTech, Inc.

### Wavy Rib:

Wavy rib is a synthetic gum rubber, which simulates the properties of real gum rubber while providing very high abrasion resistance. Very flexible. Higher degree of anti-slip quality than SBR rubber compounds. Wavy rib pattern.

- **Colors:** *Black, White & Natural*

Item No.	Thickness	Size	Irons
OP-E9007-C	4.5mm ( $\frac{5}{32}$ "	15"x30"	7
OP-E9009-C	4.8mm ( $\frac{3}{16}$ "	15"x30"	9
OP-E9012-C	6mm ( $\frac{1}{4}$ "	15"x30"	12

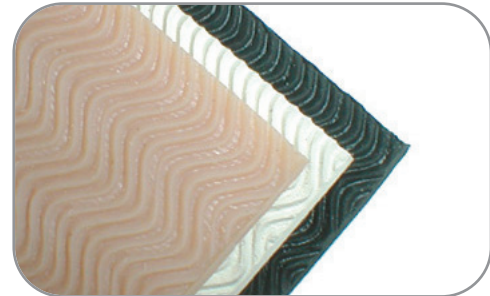


Wavy Rib

### Gum Crinkle:

Gum Crinkle, also known as Luna Crepe, is similar to Wavy Rib, but with a crinkle pattern for better wear properties.

- **Colors:** *Black & Natural*

Item No.	Thickness	Size	Irons
OP-E8907-C	4.5mm ( $\frac{5}{32}$ "	15"x30"	7
OP-E8909-C	4.8mm ( $\frac{3}{16}$ "	15"x30"	9
OP-E8910-C	5.6mm ( $\frac{7}{32}$ "	18"x36"	10.5
OP-E8912-C	6mm ( $\frac{1}{4}$ "	15"x30"	12
OP-E8915-C	8mm ( $\frac{5}{16}$ "	15"x30"	15
OP-E8918-C	10mm ( $\frac{3}{8}$ "	15"x30"	18

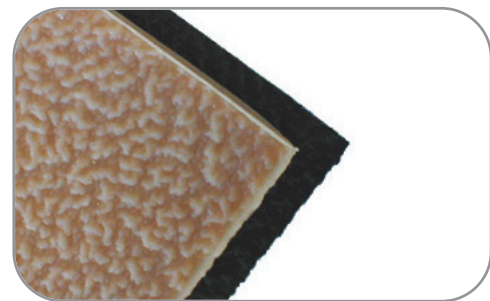


Gum Crinkle

### Fine Rib Soling:

Fine Rib, also known as Vulcrepe, is a SBR rubber compound which provides good abrasion along with flexibility for outsole use. The Fine Rib is also available in a 1/8" thickness as a special order.

- **Colors:** *Black, Brown & Oak*


Item No.	Thickness	Size	Irons
OP-E9306-C	4.5mm ( $\frac{5}{32}$ "	18"x36"	6
OP-E9309-C	4.8mm ( $\frac{3}{16}$ "	18"x36"	9
OP-E9310-C	5.6mm ( $\frac{7}{32}$ "	18"x36"	10.5
OP-E9312-C	6mm ( $\frac{1}{4}$ "	18"x36"	12
OP-E9315-C	8mm ( $\frac{5}{16}$ "	18"x36"	15
OP-E9318-C	10mm ( $\frac{3}{8}$ "	18"x36"	18

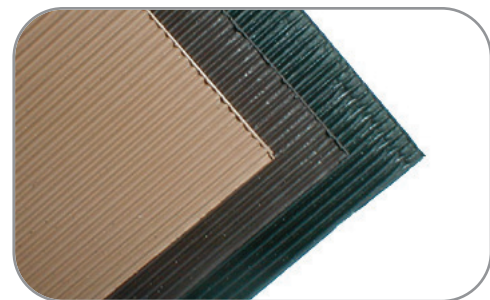

Fine Rib Soling

**C** = Color. Please see page 9 for color chart.

» SoleTech, Inc.

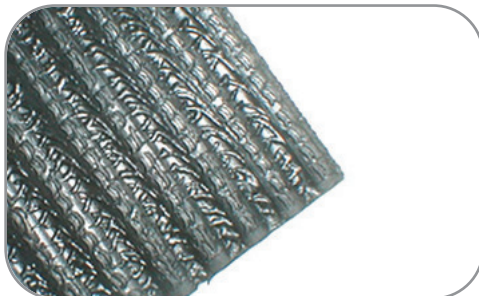


Wide Rib Soling

**Wide Rib Soling:**

Wide Rib, also known as Vulcrepe, is a SBR rubber compound which provides good abrasion along with flexibility for outsole use. The Wide Rib is suitable for applications where a thicker sole is needed.

- Colors: *Black*

Item No.	Thickness	Size	Irons
OP-E9107- <b>C</b>	4.5mm ( $\frac{5}{32}$ " )	18"x36"	7
OP-E9109- <b>C</b>	4.8mm ( $\frac{3}{16}$ " )	18"x36"	9
OP-E9110- <b>C</b>	5.6mm ( $\frac{7}{32}$ " )	18"x36"	10.5
OP-E9112- <b>C</b>	6mm ( $\frac{1}{4}$ " )	18"x36"	12
OP-E9115- <b>C</b>	8mm ( $\frac{5}{16}$ " )	18"x36"	15

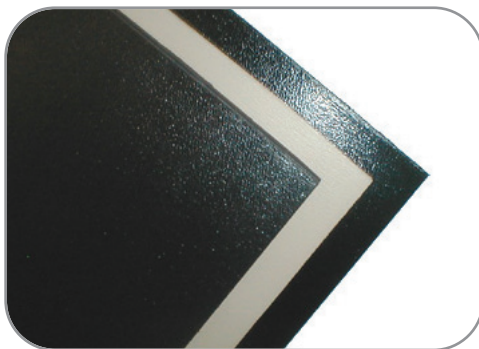

Composition Soling

**Composition Soling:**

Composition Soling is a very dense blend of an SBR (synthetic butadiene rubber) rubber compound and clay that provides good abrasion and good rigidity for outsole use.

- Colors: *Black, White, Brown & Oak*

Item No.	Thickness	Size	Irons
OP-E9405- <b>C</b>	3mm ( $\frac{3}{32}$ " )	18"x36"	5
OP-E9407- <b>C</b>	4.5mm ( $\frac{5}{32}$ " )	18"x36"	7
OP-E9409- <b>C</b>	4.8mm ( $\frac{3}{16}$ " )	18"x36"	9
OP-E9410- <b>C</b>	5.6mm ( $\frac{7}{32}$ " )	18"x36"	10.5
OP-E9412- <b>C</b>	6mm ( $\frac{1}{4}$ " )	18"x36"	12
OP-E9414- <b>C</b>	7.5mm ( $\frac{9}{32}$ " )	18"x36"	14

**C** = Color. Please see next page for color chart.

**» SoleTech, Inc.**
**SoleTech, Inc. » Soling Color Chart**

Soling		Colors Available				
Item	Iron	White (WHT)	Black (BLK)	Brown (BRN)	Oak (OAK)	Natural (NAT)
Wavy Rib	7		X			
	9	X	X			X
	12	X	X			X
Gum Crinkle	7		X			X
	9		X			X
	10.5		X			X
	12		X			X
	15		X			X
	18		X			X
Fine Rib	7		X	X	X	
	9		X			
	10.5					
	12					
	15					
	18					
Wide Rib	6		X			
	9					
	10.5					
	12					
	15			X		
Comp. Soling	5		X	X	X	
	7	X	X	X	X	
	9	X	X	X	X	
	10.5	X	X	X	X	
	12	X	X	X	X	